



RĒZEKNES TEHNOLOĢIJU AKADĒMIJA

RĒZEKNES TEHNOLOĢIJU AKADĒMIJA
Inženieru fakultāte

REZEKNE ACADEMY OF TECHNOLOGIES
Faculty of Engineering

VIDE. TEHNOLOĢIJA. RESURSI

XIII starptautiskās zinātniski praktiskās konferences materiāli
2021.gada 17.-18.jūnijs

1.SĒJUMS

ENVIRONMENT. TECHNOLOGY. RESOURCES

Proceedings of the 13th International Scientific and Practical Conference
June 17th – 18th, 2021

Volume I



Rēzekne, 2021

RĒZEKNES TEHNOLOĢIJU AKADĒMIJA
Inženieru fakultāte

REZEKNE ACADEMY OF TECHNOLOGIES
Faculty of Engineering

VIDE. TEHNOLOĢIJA. RESURSI

XIII starptautiskās zinātniski praktiskās konferences materiāli
2021.gada 17.-18.jūnijs

1.SĒJUMS

ENVIRONMENT. TECHNOLOGY. RESOURCES

Proceedings of the 13th International Scientific and Practical Conference
June 17th – 18th, 2021

Volume I

Rēzekne
2021

VIDE. TEHNOLOĢIJA. RESURSI. 13. starptautiskās zinātniski praktiskās konferences materiāli. 2021. gada 17.-18. jūnijs. *1. sējums*. Rēzekne: Rēzeknes Tehnoloģiju akadēmija, 2021. 280 lpp.

ENVIRONMENT. TECHNOLOGY. RESOURCES. Proceedings of the 13th International Scientific and Practical Conference on June 17-18, 2021. *Volume I*, Rezekne: Rezekne Academy of Technologies, 2021. pp. 280.

Rekomendējusi publicēšanai Rēzeknes Tehnoloģiju akadēmijas Zinātnes padome 2021. gada 25. maijā.
Recommended for publication by the Scientific Council of Rezekne Academy of Technologies on May, 25th, 2021.



ERDF co-funded project “Funding of international projects in research and innovation at Rezekne Academy of Technologies” No. 1.1.1.5/18/I/012

13. starptautiskās zinātniski praktiskās konferences “Vide. Tehnoloģija. Resursi” materiālu trijos sējumos ir pārstāvēti jaunākie pēdējo divu gadu pētījumi vides inženierzinātnē, vides un dabas aizsardzībā, ilgtspējīgā lauksaimniecībā, enerģētikā, materiālzinātnē, mehānikā, metālapstrādē, lāzeru tehnoloģijās, matemātiskajā modeļēšanā, elektrotehnikā, vides ekonomikā un vadībā, informācijas tehnoloģijās un sociotehnisko sistēmu modeļēšanā, vides izglītībā un ilgtspējīgas attīstības procesos. Krājumā pārstāvēto pētījumu joma ir daudzpusīga un starpdisciplināra, balstīta uz starptautisko zinātnieku kolektīvu sasniegumu rezultātiem. Konferences materiālos iekļauti 157 zinātniskie raksti, kuru autori pārstāv 14 valstis.

Proceedings of the 13th International Scientific and Practical Conference “Environment. Technology. Resources” include studies of the last two years in fields of engineering, environmental and nature protection, sustainable agriculture, energy, material science, mechanics, metalworking, laser technologies, mathematical modelling, electrical engineering, environmental economics and management, information technologies and sociotechnical systems modelling, environmental education and sustainable development. The research area presented in the proceedings is comprehensive and cross disciplinary-based, on advances of international researchers. The proceedings comprise 157 scientific papers from 14 countries.



This journal is licenced under
[Creative Commons Attribution 4.0 International \(CC BY 4.0\) License](https://creativecommons.org/licenses/by/4.0/)
The author of the paper takes responsibility for the content of the paper.

Juris Soms, Haralds Soms APPLICATION OF LOW-COST OPTICAL PM SENSOR FOR MONITORING OF PARTICULATE MATTER AIR POLLUTION IN THE URBAN ENVIRONMENT: A CASE STUDY IN ESPLANĀDE HOUSING ESTATE, DAUGAVPILS CITY	223
Juris Soms, Valdis Vorsalvs USING OF AIRBORNE LIDAR ALTIMETRY AND SEMI-AUTOMATED GIS TOOLS FOR IDENTIFICATION AND MAPPING OF FLUVIAL TERRACES IN THE AUGŠDAUGAVA SPILLWAY VALLEY	230
Veneranda Stramkale, Gederts Ievinsh, Māra Vikmane, Agnese Kirse, Ieva Kroica EFFECT OF VERMICOMPOST DOSES ON CANABIS SATIVA PHOTOSYNTHESIS-RELATED PARAMETERS, GROWTH AND YIELD	237
Inta Umbraško, Aleksandrs Petjukevičs, Anna Batjuka, Nadežda Harlamova EVALUATION OF CALCIUM CARBONATE CONTENT IN EGGSHELLS OF AVIAN, TURTLE, SNAIL, AND OSTRICH USING CHEMICAL ANALYSIS AND SCANNING ELECTRON MICROSCOPY	244
Denis Vasiliev THE USE OF DIGITAL COMMUNICATIONS TOOLS BY LATVIAN ENVIRONMENTAL NGOS	250
Angel Velikov, Ivanov Ivanov, Ivan Georgiev STRUCTURAL INVESTIGATION OF THE INTERMEDIATE LAYER IN A BIMETAL MILL ROLLER PRODUCED BY THE METHOD OF VERTICAL AXIS CENTRIFUGAL CASTING	255
Oleg Voroztsov, Sergey Tikhonov, Aleksandr Bileev MIXING VISCOUS LIQUIDS IN SETTLING TANKS	259
Serhii Yermakov, Taras Hutsol, Szymon Glowacki, Vadym Hulevskyi, Viktoriia Pylypenko PRIMARY ASSESSMENT OF THE DEGREE OF TORREFACTION OF BIOMASS AGRICULTURAL CROPS	264
Yahor Zhyluk, Daina Znotina, Alena Lisichonak PROCUREMENT MANAGEMENT AS A CONDITION OF INCREASING THE COMPETITIVENESS OF AGRO-PROCESSING ENTERPRISES	268
Natalja Zorina, Atis Skudra, Gita Revalde, Zanda Gavare COMPARISON OF AS, HG AND TL HIGH-FREQUENCY ELECTRODELESS LAMPS FOR DETECTION OF ENVIRONMENTAL POLLUTION	275

Primary Assessment of the Degree of Torrefaction of Biomass Agricultural Crops

Serhii Yermakov
*Educational and Scientific
Laboratory "DAK GPS",
State Agrarian and Engineering
University in Podilia,
Kamianets-Podilskyi, Ukraine
dakgps@pdatu.edu.ua*

Taras Hutsol
*Institute of Energy,
State Agrarian and Engineering
University in Podilia,
Kamianets-Podilskyi, Ukraine
pro-gp@pdatu.edu.ua*

Szymon Glowacki
*Institute of Mechanical Engineering
Warsaw University of Life Sciences –
SGGW
Warsaw, Poland
glowackisz@gmail.com*

Vadym Hulevskyi
*Faculty of Energy and Computer
Technology
Dmitry Motornyi Tavria State
Agrotechnological University,
Melitopol, Ukraine*

Viktoriiia Pylypenko
*Agrobiological Faculty,
National University of Life and
Environmental Science,
Kyiv, Ukraine*

Abstract - Biomass energy is an important component in the overall structure of renewable energy and has the greatest potential for increasing volumes. However, the peculiarities of the properties of agro-industrial residues are a significant disadvantage of their widespread use. The process of torrefaction allows to bring the characteristics of biofuel as close as possible to thermal coal. Different degree of heat treatment of biomass leads to a product with different heating value. Therefore, it is important to know the optimal mode of torrefaction, which will provide the best energy parameters of biofuels.

Researches of torrefaction were carried out on the basis of educational and scientific laboratory "DAK GPS" of the State Agrarian and Engineering University in Podilia. The kinetics of the relative mass of different types of biomass at different processing temperatures was considered. The dependence of the degree of torrefaction on the heat treatment temperature is revealed. As shown by studies for most biomaterials of plant origin, we can distinguish the beginning of intensive transformation and its end, after which there is a sharp slowdown in weight loss, and, accordingly, and the energy density of the samples.

Keywords - biomass, torrefaction, thermal treatment, energy intensity biofuels, thermal decomposition, thermogravimetric investigation.

I. INTRODUCTION

The growth rate of the bioenergy sector in the world is constantly growing, which requires the expansion of opportunities and improvement of technologies in existing areas of renewable energy. From this point of view, one of the most promising renewable energy sources is biomass.

The main sources of biomass are agricultural waste and residues (straw, stalks and rods of corn, stalks and husks of sunflower), as well as energy crops (willow, poplar, miscanthus), which are grown specifically for this purpose. Increasing the volume of such raw materials is an agronomic issue, and in the field of improving the energy properties of biomass there are already significant successes, but scientific research is still underway. The main obstacles to the use of plant biomass as a solid fuel are then some of its physical characteristics: low energy density, heterogeneity, particle size, etc. The peculiar chemical-physical properties, which appear as highly variable shape, size, moisture content, density, chemical composition (different proportion and nature of the hemicellulose, cellulose and lignin) and high concentrations of minor species, such as chlorine, alkali metals, nitrogen and sulphur, strongly modify the reactivity of both the starting material and the intermediate products of the decomposition and gasification processes.

The production of standardised upgraded biomass with low cost technology will definitively constitute a

Online ISSN 2256-070X

<https://doi.org/10.17770/etr2021vol1.6597>

© 2021 Serhii Yermakov, Taras Hutsol, Szymon Glowacki, Vadym Hulevskyi, Viktoriiia Pylypenko.
Published by Rezekne Academy of Technologies.

This is an open access article under the [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/).

prerequisite to produce biofuels rather than the use of raw biomass.

One of the ways to obtain a product with such properties from biomass is its torrefaction - the process of "soft" pyrolysis of biomass, heating without access of air, which takes place at temperatures of 200-320 °C and atmospheric pressure for 15-30 minutes.

The torrefaction process is aimed at improving the properties of biomass as a fuel. It consists of a slow heating of biomass in an inert atmosphere to a maximum temperature of 300 °C. The treatment results in a solid uniform product with lower moisture content and higher energy content compared to those in the initial biomass. The solid product retains approximately 70% of the initial weight and 80-90% of the original energy content [1-3].

The following property changes can be achieved by torrefaction:

- Increase of the heating value per weight unit.
- Improved hydrophobic nature. Torrefied biomass is hydrophobic and contains a very low moisture content. It does not regain humidity during storage and therefore it can be stored outside.
- Improved grinding properties [4]
- Increased uniformity and durability. The composition of torrefied biomass is uniform. The production process is controllable. This makes it a suitable solid fuel for combustion and gasification applications.

One of the big advantages of the torrefaction technology is that it converts biomass feedstocks, which generally do not have uniform qualities, into more uniform materials with predictable and controllable fuel properties [5, 6].

Torrefied products can substitute charcoal in various applications.

The thermogravimetric method of analysis is widely used to study the torrefaction process. This method allows not only to obtain quantitative characteristics of the process of term decomposition, but also to describe this process with sufficient accuracy in the form of kinetic equations [7]. Although such studies are the most accurate, they are not so common in the literature [8,9], which is due to the high complexity of the experiments and the need to have the appropriate equipment.

For production conditions it is important first of all qualitative characteristics of the final product which depend on modes of thermal processing of biomass. This is due to the fact that in the process of torrefaction is not only the removal of moisture from the raw material (drying), but also the partial thermal destruction of the organic component of biomass. It is accompanied by changes that can be detected and evaluated not only by complex laboratory analysis, but also by simple measurements, weighing or even organoleptic evaluation of samples. According to the parameters that characterize the level of thermal transformations of biomass can be a

change in color, weight loss, change in shape and size, the acquisition of new properties (fragility, hardness, etc.).

II. MATERIALS AND METHODS

It continues the work on the scientific topic "Agrobiomass of Ukraine as an energy potential of Central and Eastern Europe" (registration number 0119U103056) at the State Agrarian and Engineering University in Podilia, the joint Ukrainian-Polish educational and scientific laboratory "DAK GPS"[10-17]. The main activity of the laboratory is to improve the energy performance of biomass by thermal treatment (torrefaction), which results in torrefied products. Investigations of the primary signs of the state of heat-treated raw materials were carried out on a plant for torrefaction of tape-type biomass with passive interaction with the material. This method minimizes the physical and mechanical effects on the raw material, and the flow of the process allows to get the most homogeneously processed product.

Selected biomass samples using laboratory scales were divided into equal-weight portions of 50-100 g, which were alternately subjected to heat treatment at seven temperature regimes: 180, 200, 220, 240, 260, 280 and 300 °C. The temperature range 180-300 fully meets the conditions of the torrefaction process.

To bring the data to a more traditional form, it is necessary to build thermogravimetric curves in addition to the weight loss curves. To construct the curves, the loss in mass of the substance during heating to high temperatures is determined. The curve of the dependence of mass loss on temperature is plotted in the coordinates of the abscissa - temperature, ordinate - mass loss in grams or percent (Fig. 1). Such a curve called simple or integral shows all the mass loss from the beginning to the end of heating.

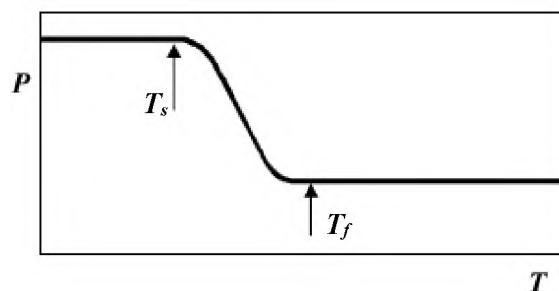


Fig. 1. Characteristics of the thermogravimetric curve in the case of a one-stage reaction

In Fig. 1 shows the characteristics of the curve of mass reduction in the case of a single-stage reaction. For any one-stage non-isometric reaction, you can choose two characteristic points on the thermogravimetric curve: a) the initial decomposition temperature T_s , ie the temperature at which the total change in mass reaches the sensitivity of thermobalances; b) the final temperature T_f , ie the temperature at which the total change in mass reaches a maximum value corresponding to the completion of the reaction. The difference $T_f - T_s$ is called the reaction

interval. These threshold values will determine the start and end modes of torrefaction.

III. RESULTS AND DISCUSSION

Any heat treatment of organic matter is primarily associated with the removal of moisture and thermally unstable elements, as well as with the transformations caused by the action of temperature. The basic classification of the bonds between moisture and material is usually a scheme where all bonds are divided into chemical, physicochemical (adsorption and osmotic) and physico-mechanical (wetting fluid and contained in capillaries). Chemically bound moisture has the highest binding energy to the material and is in a certain quantitative ratio with the dry matter. This moisture can be removed from the wood at temperatures above 180 °C, but the molecular structure of the material will change.

At a temperature of about 190 °C, pyrolysis reactions begin to take place in the surface layers of the wood, the front of which moves into the material as it heats up (Fig. 1). This causes the decomposition of the least heat-resistant components of wood, which is accompanied by the release of monoxides of carbon and nitrogen, chemically bound moisture and other products [18, 19]. The component composition of wood begins to change.

Biomass consists of three main polymer structures: cellulose, lignin and hemicellulose. Hemicellulose begins to decompose at a temperature of about 190 °C. Its decomposition begins with the loss of moisture and the formation of volatile products. It is believed that the main destructive processes take place at a temperature of 220-280 °C, with the maximum rate of weight loss corresponds to 240 °C. [20].

Cellulose and lignin are more heat-resistant, so the decomposition of cellulose occurs in the temperature range 280-370 °C, the maximum speed of this process is at 335 °C. Thermal decomposition of the main part of lignin occurs in the temperature range 200-540 °C, with the maximum rate of weight loss is observed at 420 °C [20].

Thus, the decomposition of certain components will affect the overall weight loss, and in parallel will determine the degree of torrefaction. In order to identify the boundary points of this process, it is necessary to construct appropriate thermogravimetric curves, the analysis of which will allow us to talk about the optimality of processing in a particular mode.

To determine the parameters of weight loss at different processing temperatures, a number of studies were conducted for different types of raw materials. The results of measurements of relative weight loss are shown in Fig. 2. And to bring them to the classical form of such studies, integral thermogravimetric curves are shown in Fig. 3.

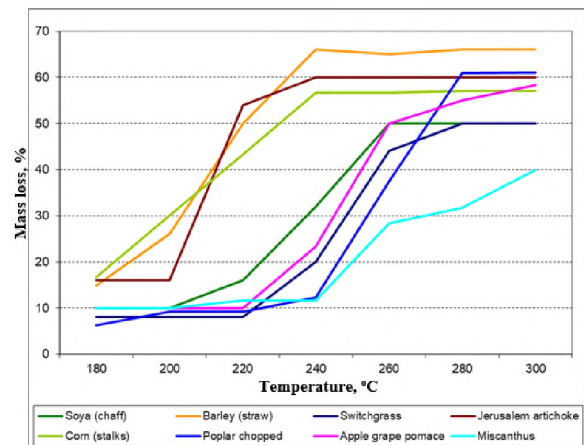


Fig. 2. Relative weight loss of some types of raw materials.

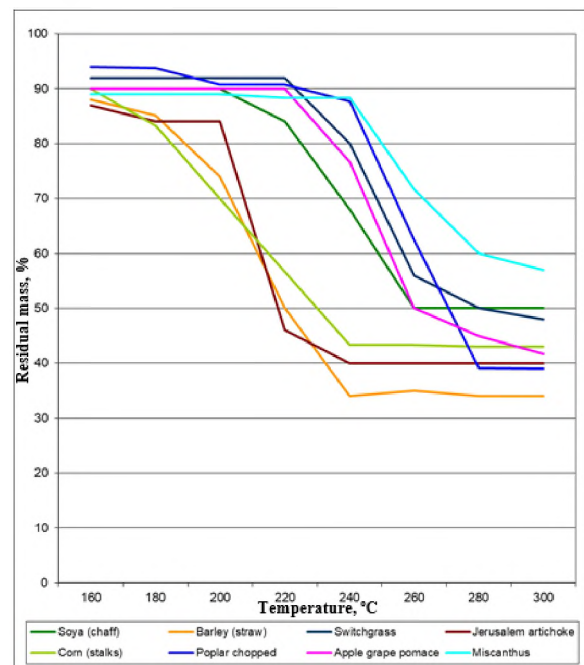


Fig. 3. Integral thermogravimetric curves of torrefaction of different types of biomass.

Analyzing the graphs, we see that the dynamics of changes in weight loss depending on the thermal treatment temperature for different biomass occurs on similar principles. At the initial stage, the curve is almost horizontal, or with a slight slope toward growth, depending on the initial humidity of the material. Obviously, as in the case of thermogravimetric curves (Fig. 2, 3) at this stage is the removal of free moisture and drying of the material. Further, there is a sharp increase in weight loss, which is apparently due to the internal destruction of organic matter of biomass and the removal of volatile substances. After some period of temperature, the curve stabilizes again, which indicates the end of the active phase of thermal transformations. This interval can be considered as temperature modes of torrefaction. As can be seen from the graphs, this interval has different values for different crops, but given that their definition does not require complex

techniques and expensive equipment, this method can be a way of initial assessment of the parameters of torrefaction and the quality of torrefaction).

IV. CONCLUSIONS

Thus, in the process of torrefaction, the potential energy of biomass is compacted by removing moisture from the wood, as well as volatile substances formed during the decomposition of hemicellulose and partial decomposition of cellulose and lignin. As shown by studies for most biomaterials of plant origin, we can distinguish the beginning of intensive transformation and its end, after which there is a sharp slowdown in weight loss, and, accordingly, and the energy density of the samples.

Thus, the control of weight loss and discoloration of biomass subjected to thermal treatment can be parameters of the initial assessment of the modes of torrefaction and the quality of torrefaction. And this in turn will allow without the presence of complex equipment in the production environment with sufficient accuracy to determine the necessary modes of torrefaction.

REFERENCES

- [1] J. Arcate, "New process for torrefied wood manufacturing". Bioenergy update. vol. 2, 2000.
- [2] A. Knapczyk, S. Francik and M. Jewiarz, "Robust optimization in production engineering-methods and application". E3S Web of Conferences, 2019, pp.132. <https://doi.org/10.1051/e3sconf/2019>
- [3] K. Mudryk, M. Wróbel and M. Jewiarz, "Innovative Production Technology of High Quality Pellets for Power Plants". Renewable Energy Sources: Engineering, Technology, Innovation. Cham, Switzerland: Springer. 2018, pp. 701–712, https://doi.org/10.1007/978-3-319-72371-6_69
- [4] B. Arias, C. Pevida and J. Feroso, Eds., "Influence of torrefaction on the grindability and reactivity of woody biomass", Fuel Processing Technology, 89, 2008, pp. 169-175.
- [5] T.G. Bridgeman, J.M. Jones and P-T. Williams, "Torrefaction of reed canary grass, wheat straw and willow to enhance solid fuel qualities and combustion properties", Fuel 87, 2008, pp. 844-856.
- [6] P.C.A. Bergman and J.H.A. Kiel, "Torrefaction for biomass upgrading", Published at 14 th European Biomass Conference and Exhibition, Paris, France, ECNRX-05-180, 2005.
- [7] P.A. Mar'yandyshev, E.I. Popova, A.A. Chernov and V.K. Lyubov, "Izotermicheskoe issledovanie drevesnogo topliva i ego organicheskikh komponentov" (Isothermal study of wood fuel and its organic components). Vestnik Cherepoveckogo gosudarstvennogo universiteta, № 2 (71), 2016, pp. 15-18.
- [8] Z.B. Jankovich and M.M. Jankovich "Pyrolysis of pine and beech woodsamples under isothermal experimental conditions". The determination of kinetic Cellulose Chemistry and Technology, 2013, Vol.47, pp. 681-697
- [9] A. Knapczyk and S. Francik, "Analysis of research trends in the field of mechanical engineering". Tehnologija. Resursi - Environment, Technology, Resources, Vol. 2, 2019, <https://doi.org/10.17770/etr2019vol2.4170>
- [10] S. Yermakov, T. Hutsol and S. Slobodian, Eds., "Possibility of using automation tools for planting of the energy willow cuttings". Renewable Energy Sources: Engineering, Technology, Innovation. 2018. pp. 419-429.
- [11] S. Yermakov, K. Mudryk and T. Hutsol, Eds., "The analysis of stochastic processes in unloading the energy willow cuttings from the hopper". Environment. Technology. Resources. Rezekne, Latvia. Proceedings of the 12th International Scientific and Practical Conference. Vol. III. 2019. pp. 249-252, <https://doi.org/10.17770/etr2019vol3.4159>.
- [12] M. Korchak, S. Yermakov and V. Maisus, Eds., "Problems of field contamination when growing energy corn as monoculture". E3S Web of Conferences. Krynica, Poland. 6th International Conference – Renewable Energy Sources. Vol.154, 2020.
- [13] V. Ivanyshyn, S. Yermakov and T. Ishchenko, Eds., "Calculation algorithm for the dynamic coefficient of vibro-viscosity and other properties of energy willow cuttings movement in terms of their unloading from the tanker". Proceedings of 6 th International Conference – Renewable Energy Sources, vol. 154, E3S Web of Conferences. 2020. pp. 04005, <https://doi.org/10.1051/e3sconf/202015404005>.
- [14] S. Yermakov, T. Hutsol, O. Ovcharuk and I. Kolosiuk "Mathematic simulation of cutting unloading from the bunker". Independent journal of management & production (IJM&P). Vol. 10, No. 7, 2019, pp. 758-777.
- [15] T. Hutsol, S. Yermakov and Ju. Firman, Eds., "Analysis of technical solutions of planting machines, which can be used in planting energy willow". Renewable Energy Sources: Engineering, Technology, Innovation. 2018. pp. 99-111.
- [16] A. Tryhuba, T. Hutsol and S. Glowacki, Eds. "Forecasting Quantitative Risk Indicators of Investors in Projects of Biohydrogen Production from Agricultural Raw Materials". Processes 2021, 9, pp/ 258. <https://doi.org/10.3390/pr9020258>
- [17] A. Tryhuba, T. Hutsol and I. Tryhuba, Eds. "Risk Assessment of Investments in Projects of Production of Raw Materials for Bioethanol". Processes. 2021; 9(1):12, <https://doi.org/10.3390/pr9010012>
- [18] V.M. Zajchenko, V.V. Kosov and V.A. Sinel'shchikov, "Torrefikaciya — sposob uluchsheniya potrebitel'skikh harakteristik granulirovannogo topliva iz biomassy". (Torrefaction is a way to improve the consumer characteristics of pelleted biomass fuel.) Energotekhnologii i resursosberezhenie (Energy technologies and resource conservation). 2012. № 5. pp. 37-41.
- [19] V.K. Lyubov, E.I. Popova and K.S. Bolotova, Eds., "A study of wood torrefaction". Bulletin of the Cherepovets State University, 2017, no. 3 (78), pp. 38-45.
- [20] P.A. Mar'yandyshev, A.A. Chernov and M.K. Eseev, Eds., "Issledovanie processa izotermicheskogo razlozheniya drevesiny", Himiya tverdogo topliva. №6, 2016. pp. 51–59.