

UDC 621.715.2-044:629.3.08


## METHOD OF CALCULATING A WASHING MACHINE WITH A PROPELLER ACTIVATOR

*Prytula M., recipient of higher education "Master's" degree*

*Dmytro Motornyi Tavria State Agrotechnological University, Zaporizhzhia, Ukraine*

Small annual production programs of work of technical service points of agricultural enterprises determine the design of a washing machine with small overall dimensions and a volume of a bath for washing solution. Heating of the solution to the working temperature is advisable to carry out with electric heaters, intensification of the cleaning process - with a blade activator [1].

The machine consists of two washing chambers, which are mounted in one body of the bath, mounted on a stand (Fig. 1). In one washing chamber, parts are cleaned with a washing solution, the movement of which is created by an activator. In the other chamber, already cleaned parts are rinsed. The activator is driven by an electric motor through a V-belt transmission.

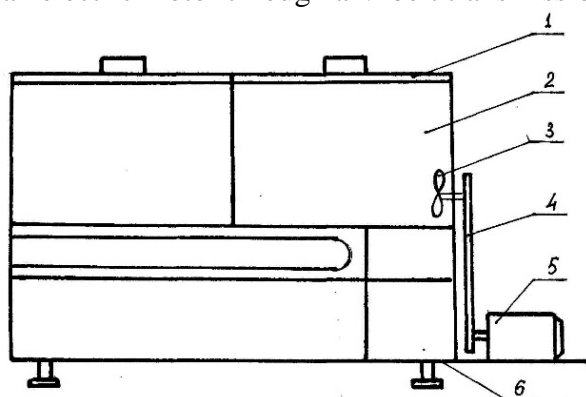

1 – cover, 2 – washing chamber, 3 – activator, 4 – V-belt drive,  
5 – electric motor, 6 – frame

**Fig. 1. Washing machine**

The motor power for the activator drive and its rotation frequency depend on the required activator power and the drive shaft rotation frequency. The required electric motor power for the  $P_{AK}$  activator drive, kW, can be determined by the formula [2],

$$P_{AK} = \frac{Q \cdot p \cdot m}{1000 \cdot \eta_{AK} \cdot \eta} , \quad (1)$$

where  $Q$  – volumetric fluid flow,  $m^3/s$ ;

$p$  – pressure created by the activator, Pa;

$m$  – power reserve factor;

$\eta_{AK}$ ,  $\eta$  – efficiency of the activator and the drive, respectively.

The volumetric flow depends on the size and speed of the activator's working elements [2]

$$Q = p \cdot D \cdot b \cdot u_{\pi} , \quad (2)$$

where  $D$  – impeller disk diameter, m;

$b$  – impeller rib width, m;

$u_{\pi}$  – absolute impeller speed, m/s.

The dimensions of the impeller depend on the diameter of the washing machine tub and are selected from the ratios:  $D = (0,3...0,9) \cdot d_B$ ,  $b = (0,005...0,09) \cdot d_B$ .

The pressure created by the activator is determined by the formula

$$p = \rho \cdot q \cdot H, \quad (3)$$


where  $\rho$  – density of washing liquid,  $kg/m^3$ ;

$q$  – acceleration of free fall,  $m/s^2$ ;

$H$  – activator pressure, m. It is taken equal to the height of the washing liquid in the bath.

Rated engine power  $P_{\text{НОМ}}$  is selected according to the value larger, but closest to the required power  $P_{\text{НОМ}} \geq P_{\text{ДВ}}$ . The installed engine power, taking into account the starting torque, should exceed the calculated value by 10-15%.

Propeller activators are recommended for use with a washing solution viscosity of up to 10 MPa. The design of the most common three-blade cast propeller activator with a wing-shaped profile is shown in Fig. 2.

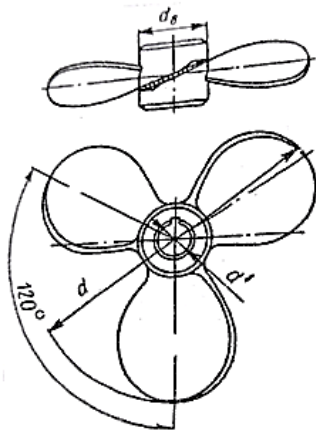

**Fig. 2. Propeller activator with a wing-shaped profile**

The main geometric parameter of the actuator is the pitch  $S$ , which is related to the angle of inclination of the blades. Usually the blade of a propeller actuator is part of a helical surface with a constant pitch. The inclination of the blades changes continuously: the minimum is on the outer circle, the maximum is at the hub..

Often the pitch is set equal to the diameter of the activator  $S = d$ . However, the best circulation of the washing solution is provided at  $S = 2d$ . In this case, the circulation speed can reach 2.0 m/s. For some geometric parameters of propeller activators, the following optimal ratios have been established: average blade width  $b = (0,2...0,35) d$ ; blade thickness  $C = (0,03...0,07) d$ ; bushing diameter  $d_{\text{ВТ}} \geq d$ .

The diameter of the activator can vary within very wide limits.  $d = 100...2500$  mm; at the same time, the edge speed of the blades must be at least 6...15 m/s.

Having a significant pumping effect, vane activators can create powerful turbulent flows in the washing solution (radial, axial, radial-axial) [3].

### References.

1. Дашивець Г. І. Обґрунтування вихідних даних для технічного завдання на створення очисного обладнання. Технічне забезпечення інноваційних технологій в агропромисловому комплексі : матеріали IV Міжнар. наук.-практ. Інтернет-конференції (Запоріжжя, 01-25 листопада 2022 р.). Запоріжжя : ТДАТУ, 2022. С. 179–180.
2. Мандрус В. І. Гідравлічні та аеродинамічні машини (насоси, вентилятори, газодуви, компресори) : Львів : «Магнолія 2006», 2018. 340 с.
3. Дашивець Г. І., Бужора Д. А. Обґрунтування і оптимізація параметрів процесу очищення деталей зануренням. Технічне забезпечення інноваційних технологій в агропромисловому комплексі : матеріали II Міжнар. наук.-практ. інтернет-конференції, м. Мелітополь, 02-27 листопада 2020 р. Мелітополь : ТДАТУ, 2020. С. 599–604.

**Research supervisor: Dashyvets H., Ph.D., Assoc.**